



VRX380 1200
VRX330 1200



VRX380 1400
VRX330 1400



VRX380 1500
VRX330 1500



VRX380 1600
VRX330 1600



VRX380 1800
VRX330 1800



VRX380 2000
VRX330 2000

refrigerated display for toppings

Available in 6 widths, 1200, 1400,
1500, 1600, 1800 and 2000mm.

Two depth options: 395mm and 335mm
to accommodate either 1/4 or 1/3
Gastronorm pans.




Curved top option




Solid top option

refrigerated display for toppings

VRX Series 330

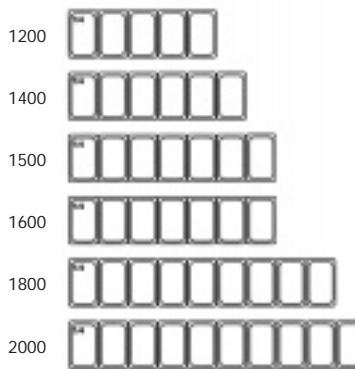

VRX Series 380

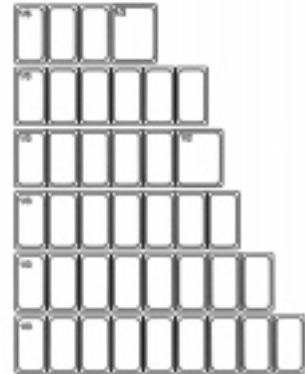

- > Standard top in fixed glass with plain or curved option.
 - > Temperature range +2/+8°C.
 - > Complete structure in stainless steel AISI 304.
 - > Electronic thermostat for perfect temperature control.
 - > End mounted condensing unit coupled to a static foamed in evaporator.
 - > No welded joints.
 - > 50mm CFC free polyurethane insulation.
- NB units do not come with gastronorm pans.*

	VRX380 (330) 1200	VRX380 (330) 1400	VRX380 (330) 1500	VRX380 (330) 1600	VRX380 (330) 1800	VRX380 (330) 2000
External Dimensions W x D x Hmm	1200 x 395 (335) x 225*	1400 x 395 (335) x 225*	1500 x 395 (335) x 225*	1600 x 395 (335) x 225*	1800 x 395 (335) x 225*	2000 x 395 (335) x 225*
Internal Dimensions W x D x Hmm	845 x 305 (245) x 155	1050 x 305 (245) x 155	1145 x 305 (245) x 155	1250 x 305 (245) x 155	1445 x 305 (245) x 155	1645 x 305 (245) x 155
Nett Capacity - Litre	39 (24)	49 (40)	54 (43)	59 (47)	68 (55)	77 (62)
Voltage Hertz	230/50	230/50	230/50	230/50	230/50	230/50
Compressor Size	4.4cc	4.4cc	4.4cc	4.4cc	4.4cc	4.4cc
Weight Empty	28kg (25kg)	30kg (27kg)	31kg (29kg)	32kg (30kg)	34kg (32kg)	36kg (34kg)
Max. Power Consumption Watt per 24Kwh/24h	1.3 (1.2)	1.4 (1.3)	1.5 (1.4)	1.6 (1.5)	1.7 (1.6)	1.8 (1.7)
Temperature Range	+2/+8°C	+2/+8°C	+2/+8°C	+2/+8°C	+2/+8°C	+2/+8°C
Refrigerant Gas	R134a	R134a	R134a	R134a	R134a	R134a
Insulation Gas	CFC free	CFC free	CFC free	CFC free	CFC free	CFC free
Insulation Thickness	50/40mm	50/40mm	50/40mm	50/40mm	50/40mm	50/40mm
Maximum Ambient Temperature	38°C	38°C	38°C	38°C	38°C	38°C
Exterior Material	S/S AISI304	S/S AISI304	S/S AISI304	S/S AISI304	S/S AISI304	S/S AISI304
Interior Material	S/S AISI304	S/S AISI304	S/S AISI304	S/S AISI304	S/S AISI304	S/S AISI304

*Overall height including glass top 425mm

Rhino produces commercial refrigeration products for the professional caterer, combining the highest standards of hygiene with the latest construction and control technology.



Staycold Export Ltd.
 9 Hunters Walk, Canal Street, Chester CH1 4EB. United Kingdom
 Telephone: +44 (0)1244 321320
 Fax: +44 (0)1244 322345.
 e-mail: info@rhinoequipment.eu

www.rhinoequipment.eu